



HC120 SPECIFICATIONS

BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery VRLA
- Can be mounted in any orientation except inverted.
- US DOT and IATA certified non-spillable
- Sealed Construction (Non-Spillable Battery)
- Can be choose to fitted with TP brass automotive terminal
- Long Service Life
- Shipped fully charged - just install and go!

PERFORMANCE FEATURES

- PHCA: 2250A at 80°F (27°C) for 5 seconds
- PCCA: 1420A at 0°F (-18°C) for 5 seconds
- CCA: 1150A at 0°F (-18°C)
- CA/MCA: 1450A at 32°F (0°C)
- HCA: 1700A at 80°F (27°C)
- Reserve capacity: 273 minutes
- Short circuit current: 5000A
- Operation temperature range:
-5°F (-15°C) to 122°F (50°C)

Nominal Dimensions

Length		Width		Height		Total Height		Weight	
mm	in	mm	in	mm	in	mm	in	kg	pound
284	11.181	268	10.55	205.5	8.091	209.5	8.25	38.7	85.32


HIGH RATE DISCHARGE AT 77°F (25°C)

5 sec.	10 sec.	20 sec.	30 sec.
2250A	2045A	1725A	1620A

EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

5min	15min	1hr	3hr	5hr	10hr	20hr
422A	208A	75A	31.2A	20.7A	11.5A	6.25A

PHYSICAL CHARACTERISTICS

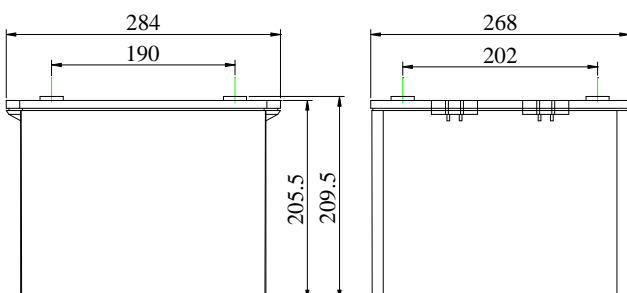

Terminal

