

DELTEC[®]

BATTERIES

DEL-LC27



Applications

- Mobile Elevating Work Platforms
- Material Handling
- Floor Machines
- Lighting Boards
- Electric Vehicles

Certificates

RoHS **REACH** **FC** **CE** **PS E** **✓**






Specification


Nominal Voltage	12 V
Nominal Capacity	105 Ah
Battery Type	AGM Lead Carbon
Terminal	M8
Approx Weight	Approx 28kg (61.7 lbs)
Container Material	ABS
Rated Capacity	105 Ah 20 Hour Rate (5.25A to 10.5V) 78 Ah 3 Hour Rate (26.0A to 10.2V) 64 Ah 1 Hour Rate (64.0A to 9.6V)
Reserve Capacity	Reserve @ 25 AMPS 192 Minutes Reserve @ 56 AMPS 66 Minutes Reserve @ 75 AMPS 42 Minutes
Operating Temperature	Discharge -40 ~ 60°C (-40~ 140°F) Charge -20 ~ 50°C (-4~ 122°F) Storage -20 ~ 50°C (-4~ 122°F)
Charge Method (25°C)	Float Use 13.50 - 13.80V @ 25 °C Cycle Charge 14.40 - 14.70V @ 25 °C Max Charge Current 20 A
Self Discharge	3% of capacity declined per month at 25°C

Dimension: 307 (L) x 168 (W) x 211 (H) x 214 (TH) Unit: mm


Terminal

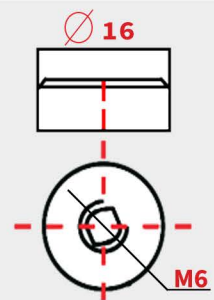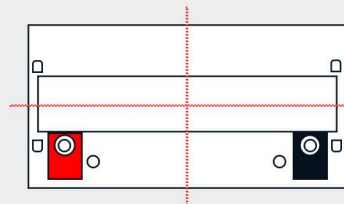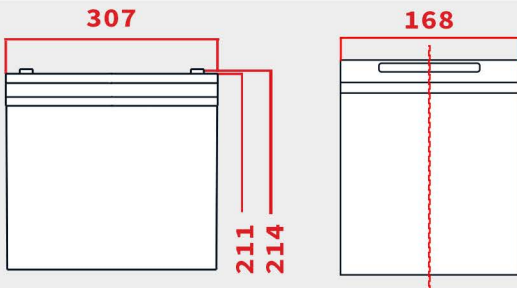

DOD

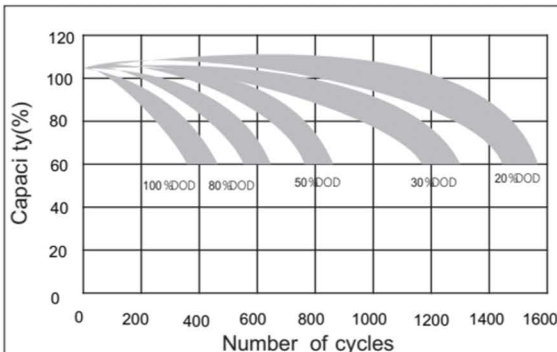

CHARGING CHARACTERISTIC

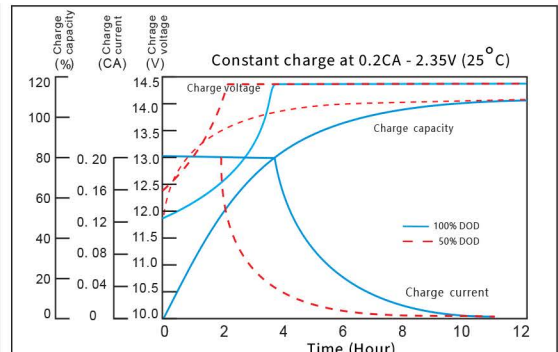

For warranty terms & conditions, visit www.deltecbatteries.com.au

PERFORMANCE WHEN IT COUNTS

1300 335 228