

Marathon PowerCycle / M12V155PC

INDUSTRIAL BATTERIES / NETWORK POWER

The Marathon PowerCycle demonstrates exceptional performance in good grid conditions and reliable backup power in float operations. Its additional powerful features offer even more in these markets. They support challenges such as 5G deployment and ongoing Network densification, which require specialized batteries in small packages and longer life with higher temperature resistance. With its enhanced cycle life, the Marathon PowerCycle also addresses new trends such as decentralized energy solutions and the need for more sustainability.

Part Number: NAMC120155HM0FA

APPLICATIONS



SPECIFICATIONS

- Design life: 20 years (until 80% C₁₀ at 20°C and 1.80Vpc)
- EUROBAT 2015 Classification »> 12 years – Very Long Life«
- Extended life time at high-temperature operation:
10 years at 35°C, 7 years at 40°C
- 1500 cycles at 60% depth of discharge (C₁₀) at 20°C
- High-Compression Absorbent Glass Mat (AGM) technology
- Unique Carbon Boost® for efficient charging
- MICROCAT® Catalyst reduces float current and minimizes water loss
- Grid plates with high-purity lead, low calcium, high-tin alloy for excellent corrosion resistance
- Available as standard or flame retardant version (UL 94 V-0)
- Very low gassing due to internal gas recombination (99 % efficiency)
- Low self discharge rate, enabling extended storage capability
- Designed in accordance with IEC 60896-21/22
- Approval: UL (Underwriters Laboratories)
- Trouble-free transportation without restriction for most rail, road, sea and air transportation (IATA, DGR clause A67)
- Manufactured in Europe in our ISO 9001 certified production plants
- Central degassing



Design life
20 years



Block battery



Grid plate



Recyclable



Valve
regulated
lead-acid
batteries



Maintenance
free (no
topping up)



RECYCLE WITH EXIDE.

Exide Technologies takes pride in its commitment to a better environment. An integrated approach to manufacturing, distributing and recycling of lead-acid batteries has been developed to ensure a safe and responsible life cycle for all of its products.



For more information please
[contact your local dealer](#)

TECHNICAL CHARACTERISTICS AND DATA

Nominal voltage	12 V
Float charge	2,29 V/C @ 20 °C
Capacity	CP 10min 1,6V/C 20°C 3500W/Bloc CC 10h 1,8V/C 20°C 155Ah
Short circuit current	3158 A (IEC60896-21/22)
Internal resistance	3,9 mΩ (IEC60896-21/22)

Terminal	F-M6-90°
Terminal Torque	11 Nm
Container	UL 94 HB (Polypropylene)
Temperature range	-40°C to 55°C
Dimensions (l x b/w x h)	125 x 559 x 283 mm
Weight	53,3 kg
Origin	Castanheira, Portugal


CONSTANT POWER DISCHARGE

W @ 20 °C	1m	3m	5m	10m	15m	30m	1h	90m	2h	150m	3h	4h	5h	6h	7h	8h	9h	10h	12h	24h	48h	72h	100h	120h
1,940 V/C							819	617	504	422	366	291	244	205	182	165	147	135	115	61,4	31,9	21,9	16	13,6
1,900 V/C	2677	2549	2360	2146	1916	1442	1029	747	595	499	439	352	294	246	214	197	176	161	136	72,1	37,5	25,8	18,8	15,9
1,850 V/C	3747	3500	3200	2700	2350	1631	1114	805	639	534	470	373	310	262	227	205	187	172	145	77	40	27,5	20,1	17
1,800 V/C	4366	4100	3650	3000	2530	1765	1137	822	654	545	485	383	320	272	235	212	189	175	147	77,9	40,5	27,8	20,3	17,2
1,750 V/C	4871	4550	4070	3250	2659	1833	1148	832	662	553	500	390	324	275	238	213	190	175	148	78,5	40,8	28	20,5	17,3
1,700 V/C	5453	5200	4600	3380	2770	1877	1154	836	665	556	501	392	325	276	239	214	191	176	148	78,6	40,8	28,1	20,5	17,3
1,650 V/C	5831	5450	4800	3470	2850	1901	1161	840	668	557	502	394	327	277	240	215	192	177	148	78,9	41	28,2	20,6	17,4
1,600 V/C	6239	5750	5000	3500	2870	1911	1170	845	670	560	505	397	329	278	241	216	193	178	150	80	41,6	28,6	20,9	17,7

CONSTANT CURRENT DISCHARGE

A @ 20 °C	1 h	90 min	2 h	150 min	3 h	4 h	5 h	6 h	7 h	8 h	9 h	10 h	12 h	24 h	48 h	72 h	100 h	120 h
1,940 V/C	71	54	44,4	37,2	32,2	25,2	20,9	17,6	15,4	13,8	12,6	11,7	10	5,3	2,69	1,85	1,36	1,15
1,900 V/C	80,5	60,9	49,9	41,5	35,5	27,9	23,1	19,8	17,4	15,6	14,3	13,3	11,2	5,9	2,99	2,06	1,51	1,28
1,850 V/C	89,2	66,9	54,6	45,2	38,7	30,3	25,1	21,6	18,8	16,9	15,5	14,4	12,1	6,4	3,25	2,23	1,64	1,39
1,800 V/C	95,8	70,9	57,2	47,4	40,5	32,2	26,9	23,3	20,4	18,1	16,7	15,5	13	6,6	3,35	2,3	1,69	1,43
1,750 V/C	99,1	72,7	58,4	48,4	41,8	33,1	27,8	24,1	20,9	18,4	16,9	15,8	13,3	6,74	3,42	2,35	1,72	1,46
1,700 V/C	101	73,9	59,2	49,2	42,7	33,4	28	24,3	21,1	18,6	17,1	15,9	13,4	6,81	3,45	2,37	1,74	1,47
1,650 V/C	103	75	60	49,7	43,2	33,8	28,2	24,5	21,3	18,9	17,3	16	13,5	6,91	3,51	2,41	1,77	1,5
1,600 V/C	105	75,5	61	50	43,5	34,1	28,4	24,6	21,4	19	17,4	16,1	13,6	6,95	3,53	2,42	1,78	1,51

Technical drawing

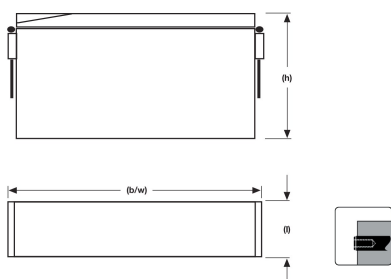

Float voltage vs. temperature

